



E22-250

(Network Management - Smarts Administration)

Total Questions: 151

Last Updated: Jun 08, 2009

Document version: 8.27.11

Thanks for purchasing techXams' Study Guide,

techXams' E22-250 study guide is a comprehensive compilation of questions and answers that have been developed by our team of certified professionals. In order to prepare for the actual exam, all you need is to study the content of this guide. An average of approximately 10 to 20 hours should be spent to study this guide and you will surely pass your exam. It's our guarantee.

Disclaimer

Neither this guide nor any material in this guide is sponsored, endorsed or affiliated with any of the respective vendor. All trademarks are properties of their respective owners.

Guarantee

If you study this guide properly and still unable to pass the exam, please send us a scanned copy of your official score at: refund@techeXams.ws. We will happily reimburse the cost of this study guide or send you an exchange of study guide of your choice free of cost.

Feedback

If you find any possible improvement, then please do let us know. We are always interested in improving the quality of this product. Feedback can be send at: feedback@techeXams.ws

Copyright

techXams holds the copyright of this material. techXams grants you a limited license to view and study this material, either for personal or commercial use. Unauthorized reproduction or distribution of this material, or any portion thereof, may result in severe civil and criminal penalties, and will be prosecuted to the maximum extent possible under law.

Question: 1

A switch appears down in Service Assurance Manager. After trying to troubleshoot the problem, an operator finds out that the switch has been removed from service. Why didn't this switch automatically become Unmanaged in Smarts?

- A. IP Availability Manager needs to be restarted to remove this switch.
- B. Other devices that were connected to this switch are still reachable by Smarts.
- C. This switch requires rediscovery.
- D. Unmanaging devices is a manual process.

Answer: D

Question: 2


Which relationship exists between a card and its ports?

- A. ConnectedVia/ConnectedTo
- B. PackagedIn/Packages
- C. Realizes/RealizedBy
- D. Underlying/LayeredOver

Answer: C

Question: 3

Click the Exhibit button. A router monitored by these polling settings has just been polled, and the operational status of Interface A is DOWN. Ten seconds after the initial poll, the interface operational status changes to UP. How long will it take from the last poll for the IP Domain Manager to set this interface's status to UP?

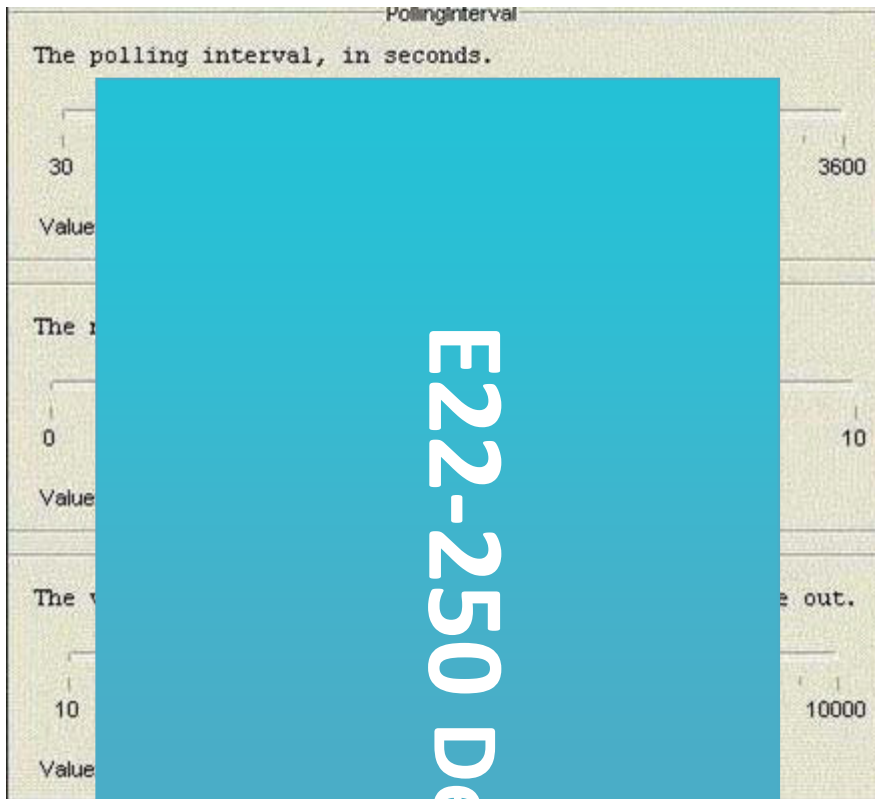

E22-250 Demo Exam

- A. 15 minutes
- B. 700 milliseconds
- C. 9 seconds
- D. 900 minutes

Answer: A

Question: 4

The SAM administrator has configured the SAM to delete files that are older than 50% to a file. What is the minimum number of files that will be deleted?

probability greater than this?

- B. 100
- C. Minimum
- D. minimum

Answer: D

Question: 5

Which information is needed by IP Availability Manager to communicate with an EMC Celerra NAS in addition to its IP address?

- A. Control Station
- B. Data Mover port
- C. Port number
- D. Username, password

Answer: D

Question: 6

Oper1, a user, would like to copy the saved configuration from the Global Manager to the Global Manager. What does the administrator need to do?

- A. Copy the saved configuration from the Global Manager to the Global Manager
- B. Copy the saved configuration from the Global Manager to the Global Manager
- C. Copy the saved configuration from the Global Manager to the Global Manager
- D. Copy the saved configuration from the Global Manager to the Global Manager

What does the administrator need to do?

- A. Copy the saved configuration from the Global Manager to the Global Manager
- B. Copy the saved configuration from the Global Manager to the Global Manager
- C. Copy the saved configuration from the Global Manager to the Global Manager
- D. Copy the saved configuration from the Global Manager to the Global Manager

Answer: D

Question: 7

Which Performance Monitor configuration parameter is used to determine if the Performance Monitor interface is too busy?

- A. IPThreshold
- B. Restart Trap Width
- C. UnicastThreshold
- D. UtilizationThreshold

Which Performance Monitor configuration parameter is used to determine if the Performance Monitor interface is too busy?

Answer: D

Question: 8

The administrator is configuring a regional network for Service Assurance. What configuration parameter needs to be configured to allow the regional network to be configured to arc...

- A. Hierarchical SAM configuration
- B. Smarts Aggregation Adapter
- C. Smarts Topology Split Manager

E22-250 Demo Exam

D. Standard SAM configuration

Answer: A

Question: 9

What does the cont

- A. If the tool is gra
- B. If the tool is vis
- C. The acceptable
- D. Which attribut

Answer: B

Question: 10

A new Windows 20
Smarts admin creat
.1.3.6.1.4.1.9999.1.
CERTIFICATION = TE
Performance = MIB
After discovering th

discovered. The
5550
2 Interface-

- A. Host
- B. It will not be ac
- C. Node
- D. Switch

Answer: D

Question: 11

To

- A. Comp
- B. HostConne
- C. Overlaying
- D. PartOf

Answer: A

E22-250 Demo Exam